

## Technical specifications Markoprint X2JET plus

|  | Advanced   | Pro  |
|--|--|--|
| System model   |  |  |
| Number of print heads                                | 1 to 2   |  |
| Maximum speed at 300 dpi                             | Trident printheads: up to 200 m/min<br>HP printheads: up to 90 m/min<br>Lexmark printheads: up to 90 m/min | Trident printheads: up to 200 m/min<br>HP printheads: up to 180 m/min<br>Lexmark printheads: up to 240 m/min |
| Recommended speed for barcode applications (300 dpi) | up to 60 m/min with HP and 90 m/min with LX  |  |
| Number of production lines                           | 2  |  |
| Maximum resolution                                   | 50 to 900 dpi  |  |
| - horizontal   |  |  |
| - vertical   | 300/600 with HP/LX, 192dpi with MX   |  |
| Print / symbol height                                | with HP & Lexmark printheads: 1 to 25 mm<br>with Trident printheads: 3 to 200 mm                           |  |
| Druckabstand   | max. 5 mm with HP or Trident<br>max. 10 mm with Lexmark  |  |
| Printing spacing                                     | 2 m  | 6 m  |
| Text memory  | unlimited  |  |
| Display size   | 2,5" / 5,7" TFT display  |  |
| Text fields  | ✓  |  |
| Counter  | ✓  |  |
| Shift code   | ✓  |  |
| Date fields  | ✓  |  |
| Date offset  | ✓  |  |
| Logo   | ✓  |  |
| Variable   | ✓  |  |
| Active fields  | ✓  |  |
| Barcodes   | ✓  |  |
| 2D-codes   | ✓  |  |
| USB stick backup                                     | ✓  |  |
| Ethernet   | ✓  |  |
| EIA232   | ✓  |  |
| USB  | ✓  |  |
| Inputs and outputs                                   | Sensor (M8), rotary encoder (M8)<br>8 inputs /8 outputs,<br>stack light alarm                              |  |
| Power supply   | 90 to 240 V AC, 50/60 Hz / max. 100 W  |  |
| PC Software  | iDesign  |  |
| Special functions                                    | Data transfer /Backup with USB Stick, database link,<br>text compilation in the system                     |  |

Changes reserved at all times

**DE KONINGH**  
CODING & LABELING

Postbus 137, 6920 AC Duiven  
Geograaf 8, 6921 EW Duiven  
Tel. +31 (0)26 741 00 00  
Fax. +31 (0)26 741 00 99  
info@dekoningh.nl - www.dekoningh.nl

Inkjet printer

# Markoprint X2JET plus



(01) 0040829174563  
(17) 201009  
(10) 13547



**DE KONINGH**  
CODING & LABELING

## Compact control system for 3 printing technologies

Markoprint X2JET plus is a consistent further development based on the reliable Markoprint X4JET series. The particularly compact and cost-effective system is suited for use in the foodstuffs, chemical, building material and pharmaceutical industries. The innovative system marks absorbent and semi-absorbent surfaces – fast, accurately and reliably.

- Innovative technology for printing label data directly onto cartons
- High availability based on cartridge technology – tested and proven a million times over
- Automatic ink type recognition and filling level control
- Highly resistant to static discharge
- Up to 10 mm distance from product

### Thermal Inkjet (HP, LX)

- new printhead on each cartridge
- wide selection of inks
- absorbent, hardly absorbent and non-absorbent surfaces possible
- high resolution (600 dpi)
- different colors

### Piezo (Trident)

- 50/100 mm with one printhead
- logos
- robust industrial printer
- absorbent surfaces
- colored inks
- secondary packaging

### Primary packaging

The intuitively designed user interface renders the X2JET plus particularly user-friendly. Animated graphics make user control simple and clear. Simple and reliable data transfer also possible via USB stick.

The printer is able to control two printheads for labeling packaging on two sides or to simultaneously label products differently on two production lines. The system supports both piezo-electric as well as thermal printing systems and can thus be used for various labeling tasks.

### Universal and flexible application

Markoprint X2JET plus uses all useable True Type fonts. All conventional 1- and 2-dimensional codes may be printed.

- Highly compact design
- Simple integration into packaging systems and conveyors for printing from the sides or from the top
- Printing height up to 25/200 mm

### Control

Data is selected via USB, network connection (LAN) or standard EIA-232 interface. The print layout may be created with iDesign software.

- Data transfer by USB stick
- Data transfer via Ethernet, USB and EIA-232
- Optional interface (printing signals via PLC or external photo sensor)
- Data transfer via Web interface

### Comprehensive range of standard accessories

- Rotary encoders, catering for different belt speeds or plant stops during printing
- Flex bracket for varying product spacing
- Assembly brackets for horizontal and vertical application

## Overview of controlled printheads



MX printhead




HP printhead (model 1)




LX printhead (model 1)



**LX and HP cartridge**  
Dual channel jet technology ensures perfect print quality

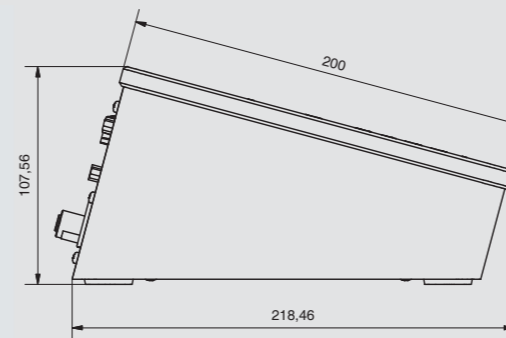

**Technical scale drawing**

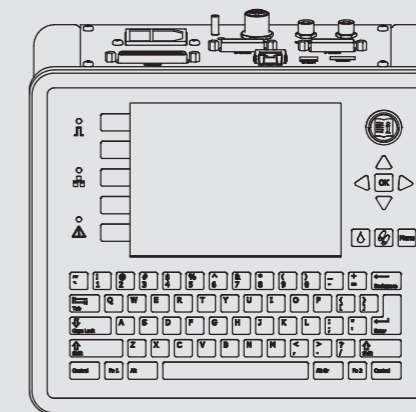

**Ethernet Interface**  
Data transfer from networks and access via web interface